

FORM PTO-1390 (Modified)  
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

24,847USA

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/786668

INTERNATIONAL APPLICATION NO.

PCT/EP00/07088

INTERNATIONAL FILING DATE

25 July 2000 (25.07.00)

PRIORITY DATE CLAIMED

30 July 1999 (30.07.99)

TITLE OF INVENTION

METHOD AND APPARATUS FOR PRESSING A PARISON

APPLICANT(S) FOR DO/EO/US

Siegfried SCHWARZER

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau. (see Form PCT/IB/308 dated 08 Feb 2001
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US). (08.02.01)
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ A copy of the International Search Report (PCT/ISA/210).
8. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)). executed 13 Feb. 2001 (13.02.01)
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

## Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☒ Certificate of Mailing by Express Mail
20. ☒ Other items or information:

-copy of cover sheet of International Publication No. WO 01/09049 A1, published on 8 February 2001 (08.02.2001)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/786668

INTERNATIONAL APPLICATION NO.

PCT/EP00/07088

ATTORNEY'S DOCKET NUMBER

24,847USA

21. The following fees are submitted:

**BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5)) :**

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... 1,000.  
~~8970.00~~
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... 860.  
~~8840.00~~
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... 710.  
~~8890.00~~
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... 690.  
~~8670.00~~
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ..... 100.  
~~8880.00~~

**ENTER APPROPRIATE BASIC FEE AMOUNT =****\$860.00**Surcharge of **\$130.00** for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).**\$0.00**

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	11 - 20 =	0	x \$18.00
Independent claims	2 - 3 =	0	x <del>78.00</del> 80.

**\$0.00****\$0.00**Multiple Dependent Claims (check if applicable). ☐**\$0.00****TOTAL OF ABOVE CALCULATIONS =****\$860.00**Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). ☐**\$0.00****SUBTOTAL =****\$860.00**Processing fee of **\$130.00** for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).**\$0.00****TOTAL NATIONAL FEE =****\$860.00**Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☒**\$40.00****TOTAL FEES ENCLOSED =****\$900.00**

Amount to be:

refunded

\$

charged

\$

☒ A check in the amount of **\$900.00** to cover the above fees is enclosed.

☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees.  
 A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **19-5425** A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:

Gary A. Hecht, Esquire  
 SYNNESTVEDT & LECHNER LLP  
 1101 Market Street  
 2600 Aramark Tower  
 Philadelphia, PA 19107-2950  
 United States of America

Tele: (215) 923-4466  
 Fax: (215) 923-2189  
 E-mail: ghecht@synnlech.com

SIGNATURE

Gary A. Hecht

NAME

36,826

REGISTRATION NUMBER

08 March 2001 (08.03.01)

DATE

Express Mail Label No. EL598705059US

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE  
UNITED STATES DESIGNATED/ELECTED OFFICE**

Applicant: Siegfried Schwarzer

International Application  
PCT/EP00/07088

Int'l Filing Date: 25 July 2000 (25.07.00)

For: Method and Apparatus for Pressing A  
Parison

GAU:

Examiner:

Atty. Docket No. 24,847USA

Box PCT  
Attn: DO/EO/US  
Commissioner for Patents  
Washington, D.C. 20231

**PRELIMINARY AMENDMENT**

Sir:

**In the Specification:**

On page 2, please add the following paragraph before the paragraph beginning with "It is known per se from DE 32 32 288 C1".

- It is known per se from US 4 411 681 A to raise a plunger first into its end operating position in which a ring of the plunger lies against an undivided guide ring of a neck mold (Figures 1 to 3). A glass gob then falls into a filling orifice of a mold cavity of a longitudinally- and transversely-divided parison mold and onto the tip of the plunger. A blow head is introduced from the top into the filling orifice (Figure 2) and blows the glass gob firmly into the parison mold and the neck mold and around the plunger, wherein a space is existing between the blow head and the glass (Figure 3). The plunger is subsequently lowered into a middle position (Figure 4). Compressed air is introduced through the neck and preliminarily blows the parison until it also contacts the blow head. Finally, the finished parison is removed from the parison

mold (Figure 5). This combined process of settle and preliminarily blowing the parison whilst using the plunger requires an expensive construction and a comparatively long cycle. Moreover, it is disadvantageous that a sealing edge of the neck of the parison is formed by means of the guide ring.- -

In the Claims:

Please cancel Claims 1-11.

Add the following claims.

- -12. Method for producing a parison (18) by means of a pressing process in a parison mold (1) of a press-blow glass forming machine, comprising the following steps:

- (a) A gob (38) of molten glass is introduced from a feed device (32) from the top through a loading orifice (26) into a cavity (17) of the parison mold (1), while the parison mold (1) comprises a neck mold having a closed, longitudinally-divided neck tool (2) which forms a neck (19) of the parison (18),
- (b) a pressing plunger (10) is pressed into the glass gob (38) through a middle through passage (42) of the neck mold until said pressing plunger in an end operating position (Figure 4;9) lies against the neck mold, wherein the parison (18) is preliminarily pressed until the cavity (17) is partially filled with molten glass,
- (c) simultaneously with or following Step (b) pressure is exerted using a pressing element (44), which defines a part of the cavity (17), on a base (66) of the parison (18) which has been preliminarily pressed according to Step (b), until the cavity

(17) is completely filled with molten glass and the parison (18) is finish-pressed, and

- (d) when the pressing plunger (10) is in the end operating position (Figure 4; 9), the cavity (17) is completely filled with molten glass and the parison (18) has been formed, on the one hand the pressing element (44) and all the components of the parison mold (1) with the exception of the still closed neck tool (2) are removed to the extent that the still closed neck tool (2) can be transferred with the parison (18) held by the neck tool (2) at the neck (19) into a finish-forming station of the glass forming machine and on the other hand the pressing plunger (10) is moved back out of the parison (18) into an end discharge position (Figure 6),

characterized by the following steps:

- (A) In Step (b) the pressing plunger (10) is moved into its end operating position (Figure 4;9) as far as the stop surface (24) on the neck tool (2), and
- (B) an axially outer sealing edge (20) of the neck (19) of the parison (18) is completely formed by the pressing plunger (10).

13. Method according to claim 12, characterized in

that the glass comes into contact with the pressing element (44) already in Step (A), and

that the pressing element (44) is moved out of the cavity (17) by the glass.

14. Method according to claim 12, characterized in  
that the parison mold (1) comprises longitudinally-divided parison mold halves (5,6),  
  
that the glass gob (38) is introduced through the loading orifice (26) formed in a base of  
the closed parison mold halves (5,6), and  
  
that the loading orifice (26) is closed after loading by means of the pressing element 44.
15. Method according to claim 12, characterized in that  
  
the maximum penetration depth of the pressing element (44) into the cavity (17)  
occurring in Step (B) is determined by means of sensing (57) the displacement of the  
pressing element (44) relative to the parison mold (1), and  
  
that the displacement sensing (57) is used for controlling and/or regulating the mass of  
the glass gobs (38) leaving the feed device (32).
16. Apparatus for producing a parison (18) by means of a pressing process in a parison mold  
(1) of a press-blow glass forming machine,  
  
wherein a gob (38) of molten glass can be introduced from a feed device (32) at the top  
through a loading orifice (26) into a cavity (17) of the parison mold (1), while the parison  
mold (1) comprises a neck form with a closed, longitudinally-divided neck tool (2) which  
forms a neck (19) of the parison (18),  
  
with a pressing plunger (10) which can be pressed into the glass gob (38) through a  
middle through-passage (42) of the neck mold as far as an end operating position (Figure  
4;9) in position against the neck mold for the purpose of the preliminary pressing of the

parison (18) and which pressing plunger can be removed from the parison (18) after the parison (18) has been formed,

and with a pressing element (44) which can move relatively to the parison mold (1) and defines a part of the cavity (17),

wherein using the pressing element (44) it is possible to exert pressure on a base (66) of the preliminarily pressed parison (18) until the cavity (17) is completely filled with molten glass and the parison (18) is finish-pressed,

characterized in that the pressing plunger (10) in its end operating position (Figure 4;9) lies (24) against the neck tool (2),

and that an axially outer sealing edge (20) of the neck (19) of the parison (18) can be completely formed by the pressing plunger (10).

17. Apparatus according to claim 16,

characterized in that the parison mold (1) comprises longitudinally-divided parison mold halves (5,6),

that the loading orifice (26) is formed in a base of the closed parison mold halves (5,6),

and that the loading orifice (26) can be closed after loading by means of the pressing element (44).

18. Apparatus according to claim 16,

characterized in that the parison mold (1) comprises a block mold (72) which is not longitudinally-divided,

that the pressing element (44) is displaceably mounted in a lower base orifice (77) of the block mold (72),

that the closed neck tool (2) in the upwards direction is adjacent to the loading orifice (26) of the block mold (72),

and that a locking ring (74) of the block mold (72) in a radially outwards direction lies adjacent to the closed neck tool (2).

19. Apparatus according to claim 16,

characterized in that a shaft (16), which is wider than the pressing plunger (10), is adjacent to a foot (22) of the pressing plunger (10),

and that a forming ring (21) for the purpose of forming the complete axially outer sealing edge (20) of the neck (19) of the parison (18) is formed in an annular end face (23) of the shaft (16) adjacent to the foot (22).

20. Apparatus according to claim 19,

characterized in that the end face (23) for the purpose of defining the end operating position (Figure 4;9) of the pressing plunger (10) lies against a stop surface (24) of the closed neck tool (2).



21. Apparatus according to claim 16,

characterized in that a cylindrical shaft (16) is adjacent to a foot (22) of the pressing plunger (10),


and that the shaft (16) is received on a last part of the path of the pressing plunger (10) as far as its end operating position (Figure 4;9) in a centering ring (41) which is fixed relative to the parison mold (1) and is guided and centered in the radial direction through the centering ring (41).

22. Apparatus according to claim 21,

characterized in that the centering ring (41) is not longitudinally divided and that the centering ring (41) is held radially outwards in a holding groove (7) of the neck tool (2).--

Respectfully submitted,

March 8, 2001

  
\_\_\_\_\_  
Gary A. Hecht, Reg. No. 36,826  
SYNNESTVEDT & LECHNER LLP  
1101 Market Street  
2600 Aramark Tower  
Philadelphia, PA 19107-2950  
Tele: (215) 923-4466  
Fax: (215) 923-2189

GAH:pmf

81 PRTS

09/786668

JC02 Rec'd PCT/PTO 0 8 MAR 2001

Express Mail Label No. EL598705059US

954/234 WO

The firm HERMANN HEYE

1

DESCRIPTION

Method and Apparatus for Pressing a Parison

The invention relates to a method according to the preamble of claim 1 and apparatus according to the preamble of claim 5.

In the case of a known apparatus of this type (US 4 336 050 A) the loading orifice is located at the top in a block mold which is not longitudinally divided. A longitudinally-divided parison mold middle piece is disposed between the block mold and the neck mold. The neck mold comprises a longitudinally-divided neck tool and a guide ring, which is not longitudinally-divided and is held in a radial groove of the neck tool, for the pressing plunger. The end operating position of the pressing plunger is defined by virtue of the fact that an upper annular surface of a pressing plunger holder moves into position against an annular counter surface of the guide ring. Owing to the axial play, which increases as the wear increases, between the guide ring and the closed neck tool the end operating position changes in an undesired manner. The axial outer sealing edge of the neck is obviously formed by the opposite radial end face of the guide ring. This leads to undesired sharp-edged glass seams, which are pressed into the mold gaps at the transition from the radially extending, axially outer sealing edge to the adjacent radially inner and radially outer neck contour. These glass seams also impair the sealing effect between the neck and its closure device.

With respect to the prior art, Figures 1 and 2 of US 4 662 928 A disclose a forming tool of a blow-blow machine known per se for producing champagne bottles. It comprises a longitudinally-divided parison mold and a longitudinally-divided neck tool. An axially moveable plunger lies in its axial end operating position against the closed neck tool. The plunger forms a small, radially inner part of the axially outer sealing edge of the neck of the champagne bottle. The remaining part of the sealing edge is formed by the neck tool. An annular glass seam is pressed between these two sealing edge parts into the parting line between the plunger and the neck tool (Figure 2 and 3A). Moreover, opposite perpendicular glass seams, which originate from the juncture plane of the neck tool, extend as far as into the

sealing edge. These glass seams must be subsequently removed in a costly procedure by „fire polishing“ (Figure 3B). In order to avoid these disadvantages US 4 662 928A proposes to allow the entire sealing edge to be formed by a guide ring which is not divided and which is held in the neck tool (Figures 4 to 6). However, this then causes similar disadvantages to those experienced in US 4 336 050A.

In the case of apparatus known per se (Figure 1 or EP 0 327 240 A1) the end operating position of the pressing plunger is determined exclusively by the deforming resistance of the molten glass when the cavity is completely filled with glass and the parison has been completely pressed. Thus, the end operating position of the pressing plunger depends upon the respective mass of the gob and/or of the respective volume of the cavity. The pressing plunger comprises on its foot a slightly conical, almost cylindrical guide section. The slight conical shape is intended to facilitate the subsequent removal of the pressing plunger from the parison. On a final part of the path of the pressing plunger as far as into its end operating position the guide section is received into a guide ring, which is not longitudinally divided, and as a result is centered in the radial direction and guided. Owing to the slight conical shape of the guide section a radial gap, whose width depends upon the respective end operating position of the pressing plunger, remains between the guide section and the guide ring. During the pressing process it is possible in certain operating situations for the glass mass to penetrate into this gap in an undesired manner. The guide ring is held radially outside in a holding groove of the neck tool. The guide ring comprises on its end facing the cavity a forming ring for forming the axially outer sealing edge of the neck of the parison.

It is known per se from DE 32 32 288 C1 to introduce the glass gob into a block mold cavity. The volume of the block mold cavity is first enlarged by an additional volume. This can occur by moving a piston downwards in a base cavity of the block mold. The additional volume is nullified again by virtue of the upwards movement of the piston until the parison has been formed.

Apparatus for adjusting the mass of the glass gob on a feeder device is known per se from GB 2 178 421 A.

The object of the invention is to improve the manner in which the neck of the parison is formed.

This object is achieved with respect to the method by virtue of the features of claim 1. Owing to the fact that the pressing plunger moves into position against the neck tool, the pressing plunger now in an extremely precise manner always reaches the same end operating position irrespective of the mass of the glass gob and the volume of the cavity in the parison mold. This creates uniform inner contours of the necks of the parisons. Furthermore, because the entire axially outer sealing edge of the neck is no longer formed by the guide ring but rather by the pressing plunger itself, the slightly conical guide section can be formed in a more conical shape at the foot of the pressing plunger in a favourable manner. As a consequence, the pressing plunger can be removed easier from the finish-pressed parison and damage to the neck inner surface of the parison is prevented. The parison is pressed in two stages. In the first stage the parison is pre-pressed by the pressing plunger until the pressing plunger reaches its end operating position and in the second stage the parison is finish-pressed by the pressing element. The result is a parison with an ideally pressed-out, undamaged neck and also the glass is distributed in an extremely favourable manner. The invention is particularly suitable for use in the so-called I.S. (Individual Section) press-blow glass forming machines.

The features of claim 2 hold the pressing element in contact with the glass for a comparatively long period of time

The loading orifice in accordance with claim 3 can be designed in a funnel-like manner in order to improve and facilitate the manner in which the glass gob can be introduced without interference into the cavity. In most cases this negates the requirement for a separate loading funnel. Such a loading funnel would otherwise need to be moved as a separate element over the loading orifice for loading purposes and be removed once the loading is complete. This would mean higher structural and operational costs.

It is not possible in practice to avoid fluctuations in the mass of the glass gob. The features of

claim 4 render it possible in a rapid and reliable manner to influence the manner in which the desired optimum gob mass is maintained.

The object mentioned above is achieved with respect to the apparatus by virtue of the features in claim 5. Essentially the same advantages as mentioned in connection with claim 1 are achieved.

The loading orifice in accordance with claim 6 can in preference be formed in the shape of a funnel in order to facilitate and improve the manner in which the glass gob is introduced into the cavity.

The features of claim 7 are of particular advantage when producing wide-neck ware. The closed parison mold can be held together in a particularly convenient manner. It is necessary to hold the parison mold together in order to prevent it opening during the pressing procedure when the pressing forces attempt to open the individual parts of the parison mold. If the parison mold were to open, gaps would occur in the mold into which the glass mass could be pressed in an undesired manner. A longitudinally-divided parison mold middle piece can also be disposed between the block mold and the neck tool according to DE 32 32 288 C1. In this manner it is also possible using a block mold to produce narrow-neck ware.

According to the features of claim 8 the axially outer sealing edge of the neck is no longer formed by a guide ring in the neck tool or by the neck tool, but rather is formed completely by an element of the pressing plunger. This increases the precision in the manner in which the neck is formed.

In accordance with claim 9 the end operating position can be achieved structurally in a particularly convenient manner.

By virtue of the features of claim 10 the pressing plunger is guided in a precise radial manner in the final path section, which is of particular importance for forming the parison, in the radial direction on a cylindrical shaft surface.

In accordance with claim 11 the centering ring is also held in a reliable manner in the neck tool when the neck tool is open. The neck tool is only opened during operation for the purpose of discharging the hollow glass object which is finish-formed in the finish-forming station.

These and further features and advantages of the invention are explained in detail hereinunder with respect to the exemplified embodiments illustrated in Figures 2 to 9 of the drawings, in which:

- Figure 1 shows a longitudinal sectional view through a part of a closed parison mold according to the prior art with the pressing plunger in its end operating position,
- Figure 2 shows a partially sectioned side view of a pressing plunger according to the invention,
- Figure 3 shows a longitudinal sectional view through a closed parison mold according to the invention with an open loading orifice and the pressing plunger in the loading position,
- Figure 4 shows a longitudinal sectional view through the parison mold as shown in Figure 3 with the pressing element inserted in the loading orifice and the pressing plunger in its end operating position,
- Figure 5 shows a longitudinal sectional view through the parison mold as shown in Figure 4 with the pressing element in its end operating position,
- Figure 6 shows a longitudinal sectional view through the closed neck tool with a finished parison and the pressing plunger in its lowermost or end discharge position,

Figures 7 and 8 show connection diagrams for different operating types of pressing elements, and

Figure 9 shows a longitudinal sectional view through a closed parison mold with the block mold and the pressing plunger and the pressing element each in their end operating position.

Referring to Figure 1, the lower part of a closed parison mold 1 is illustrated. The parison mold 1 comprises a longitudinally-divided neck tool 2 having neck tool halves 3 and 4 and parison mold halves 5 and 6. A guide ring 8, which is not longitudinally divided, is held in a radial holding groove 7 of the neck tool 2. The guide ring 8 comprises a middle through-passage 9 for a pressing plunger 10. The pressing plunger is mounted on a piston rod 11 of a known piston-cylinder unit, not further illustrated, and can be raised and lowered in the directions of a double arrow 12. The pressing plunger 10 comprises a plunger tip 13, a distinctly conical section 14 and a slightly conical section 15 which forms a foot of the pressing plunger 10. A cylindrical shaft 16 of the pressing plunger 10 which has a larger diameter lies adjacent to the foot 15 in the downwards direction.

In a known manner the parison mold halves 5, 6 are provided at the top with a loading orifice which as shown in Figure 1 of EP 0 327 240 A1 can be closed by means of a parison mold base once the glass gob has been introduced into the cavity 17 of the parison mold 1 for the pressing procedure.

Figure 1 illustrates the pressing plunger 10 in its uppermost end operating position which is defined without any additional mechanical stop merely by virtue of the deforming resistance of the molten glass in the cavity 17. Depending upon the mass of the gob of molten glass introduced into the cavity 17 and upon the state of wear of the parison mold 1 and of the pressing plunger 10, the penetration depth of the pressing plunger 10 in the cavity 17 is greater or less when the pressing plunger 10 is in the end operating position. This results in the fact that in normal operation changing axial regions of the slightly conical section 15 of the pressing plunger 10 lie opposite the middle through-passage 9 of the guide ring 8 when

the pressing plunger 10 is in the end operating position. This creates annular gaps of different widths between the middle through-passage 9 and the slightly conical section 15 and leads to the greater or less risk of the molten glass being pressed into this annular gap during the pressing procedure.

Figure 1 illustrates a finish-pressed parison 18 in the cavity 17. The parison comprises at the bottom a neck 19 whose axially outer edge 20 is formed by means of a forming ring 21 formed at the top in the guide ring 8. Since the guide ring 8 is not longitudinally divided, the axial outer edge 20 of the neck 19 does not have any longitudinal seams. This is advantageous in order to be able to close the finished hollow glass object in a reliable manner.

In all the illustrations like parts bear like reference numerals.

The pressing plunger 10 in accordance with the invention as shown in Figure 2 is not divided in its length into the sections 14, 15 as shown in Figure 1, but rather is continuously uniformly conical in shape over its entire length. However, for reasons relating to process technology it is also possible in the case of the pressing plunger 10 in accordance with the invention to provide a conical shape which changes over its length. In any case, it is possible in accordance with the invention to select the conical shape such that once the parison 18 has been finished the pressing plunger 10 can be removed from the parison without damaging the inner surface of the parison.

The shaft 16 which is formed wider than the pressing plunger 10 lies adjacent to the foot 22 of the pressing plunger 10. The forming ring 21 for forming the axially outer edge 20 of the neck 19 is formed in an annular end face 23 of the shaft 16 adjacent to the foot 22. Moreover, the annular end face 23 as shown in Figures 4, 5 and 9 lies against a stop surface 24 of the closed neck tool 2 for the purpose of defining the end operating position of the pressing plunger 10. The annular end face 23 chamfers radially outwards to become a chamfer 25 at the cylindrical shaft 16.

Figure 3 shows the parison mold 1 with the closed neck tool halves 3, 4 and likewise closed



parison mold halves 5,6. The pressing plunger 10 is located in an axial intermediate position, the so-called loading position in which the plunger tip 13 has penetrated the neck tool 2 and a short piece penetrates the cavity 17 of the parison mold halves 5, 6. A loading orifice 26 is formed in the upper region of the parison mold halves 5, 6. The loading orifice 26 is formed substantially in a funnel shape with conical wall sections 27 and 28. A cylindrical receiving section 29 is located between the conical wall sections 27,28.

An orifice 31 of a feed device 32, which contains molten glass 33, is disposed above the loading orifice 26 coaxially with a longitudinal axis 30 of the parison mold 1. A feeder plunger 34, which can be raised or lowered in the directions of the double arrow 35 in a manner known per se by means of a drive 36, is disposed in the glass 33 coaxially with the orifice 31. The drive 36 is controlled by way of a line 37 so that the molten glass 33 exits the orifice 31 in such a manner that ultimately glass gobs 38 have the most constant mass possible. A strand 33 of molten glass exits in a manner known per se the orifice 31 in dependence upon the vertical movement of the feeder plunger 34. The glass gobs 38 are severed from this glass strand 33 in succession by means of a shear mechanism 39 which can move in the directions of the double arrow 40. The glass gobs 38 fall either directly into the loading orifice 26 or are introduced into the loading orifice 26 by means of a trough system known per se, which for sake of simplicity is not illustrated.

Referring to Figure 3, such a glass gob 38 has been introduced into the cavity 17 through the loading orifice 26 and has fallen onto the plunger tip 13. The plunger tip 13 had slightly penetrated the glass gob 38 but not so far that the glass mass would pass into the region of the neck tool halves 3, 4.

Figure 3 shows the radially outer part of a centering ring 41, which is not longitudinally divided, held in the holding groove 7 of the neck tool 2. The centering ring 41 comprises a cylindrical middle through-passage 42 which at the bottom becomes an extension 43 of the centering ring 41.

Figure 4 shows a later stage in the method than in Figure 3. First, a pressing element 44

comprising a guide sleeve 45 is inserted from above into the loading orifice 26 as shown in Figure 1. The guide sleeve 45 comprises at the bottom and radially outwards a chamfer 46 which facilitates the introduction of the loading sleeve 45 into the conical wall section 27 and the cylindrical receiving section 29. The guide sleeve 45 is finally disposed in the manner illustrated in Figure 4 with a slide fit in the receiving section 29 and is located with its lower axial stop against an annular stop surface 47 of the parison mold halves 5,6. The stop position is maintained by means of a mechanism, not illustrated, which moves the assembly 44, 45, 48, until the finished parison is subsequently removed from the mold. The pressing element 44 is formed as a piston rod of a piston-cylinder unit 48 which is pneumatic in this instance. A piston 49, attached to the pressing element 44, of the unit 48 can be displaced in a cylinder 50 of the unit 48. The cylinder 50 is attached to the guide sleeve 45, for example by a weld seam 51. A first cylinder chamber 52 is connected to a line 53 and a second cylinder chamber 54 is connected to a line 55.

A sensing element 56 of a displacement sensor 57 is connected to the piston 49. The displacement sensor 57 is attached to the cylinder 50. The sensing element 56 is guided in a displaceable manner through a sealed opening 58 in the cylinder 50. The sensing element 56 is moreover connected to a brush 59 of a potentiometer 60 of displacement sensor 57. An output line 61 of the displacement sensor 57 is connected to an electrical control device 62 whose output is connected to line 37 (cf. Figure 3).

A pressure spring 64 is disposed between the piston 49 and an outer wall 63 of the cylinder 50 and said pressure spring prestresses the piston 49 and the pressing element 44 in the downwards direction in Figure 4. For this purpose a 3 port/2 position valve 65 is connected to the line 55 as shown in Figure 7. The line 53 issues to the atmosphere.

If the assembly consisting of the pressing element 44, guide sleeve 45 and piston-cylinder unit 48 is now inserted into the loading orifice 26 as shown in Figure 3 from above, the pressing element 44 is received into the cavity 17 as deep as possible owing to the pushing effect of the pressure spring 65 and to the effect of its own weight. The pressing plunger 10 is then moved upwards out of its loading position illustrated in Figure 3. In so doing, the

chamfer 25 of the cylindrical shaft 16 makes its way into the extension 43 of the centering ring 41 and thus centres the pressing plunger 10 relative to the neck mold 1 [sic]. From here the shaft 16 is guided in a strictly radial manner in the middle through-passage 42 of the centering ring 41. The pressing plunger 10 is centered accordingly exactly relative to the parison mold 1. The upwards movement of the pressing plunger 10 continues until the annular end face 23 of the shaft 16 moves into position against the stop surface 24 of the neck tool 2. Until this position is achieved, pressing plunger 10 moves further into the glass gob 38 and pushes a base 66 of the glass gob 38 in contact with a surface 67 of the pressing element 44, which surface faces the glass gob 38. At this time, as shown in Figure 7, the second cylinder chamber 54 is vented via the line 55. Against the force of the pressure spring 64 and the intrinsic weight of the pressing element 44 and of the piston 49, the glass gob 38 is therefore able to displace said pressing element and said piston upwards without encountering any resistance until as shown in Figure 4 the annular end face 23 lies against the stop surface 24. From this moment onwards the pressing plunger 10 is only a passive forming element. The pressing plunger 10 has at this time taken up its continuously uniform, defined position relative to the neck tool 2 and the parison mold halves 5, 6. The neck 19 (Figure 1) of the parison 18 is formed accordingly in a constant manner.

In the method stage illustrated in Figure 4, the neck chamber in the neck tool 2 and in the forming ring 21 is not yet filled with molten glass. This first occurs in the next method step, the end of which is illustrated in Figure 5.

Furthermore, referring to Figure 5, the pressing plunger 10 is located in its uppermost end operating position in which the annular end face 23 lies against the stop surface 24. By switching the directional control valve 65 shown in Figure 7 into its lower switching position the line 55 and thus the second cylinder chamber 54 were connected to a pneumatic pressure line 69. This caused the piston 49 and the pressing element 44 to be displaced out of the position illustrated in Figure 4 into the lowest position illustrated in Figure 5. In so doing, the parison 18 was also finish-pressed in the region of its neck 19. The brush 59 has likewise moved to its lowest possible position relative to the potentiometer 60. This pressing plunger position information passes via the output line 61 into the electrical control device 62 which

where appropriate makes an adjustment to the mass of the glass gob 38 via the stroke of the plunger 34.

As the parison 18 has now been finish-pressed, it can be removed from the mold. For this purpose, the directional control valve 65 is first switched into its upper switched position illustrated in Figure 7 and the second cylinder chamber 54 is vented. The pressing plunger 10 is then drawn back out of its end operating position illustrated in Figure 5 into its lowest end discharge position illustrated in Figure 6. Subsequently, the assembly consisting of the pressing element 44, guide sleeve 45 and piston-cylinder unit 48 is removed. Finally, the parison mold halves 5, 6 are opened in a manner known per se.

The pressing plunger 10 is now located fully outside the parison 18 and is lowered to the extent that the neck tool 2 with the centering ring 41 and with the parison 18 can be transferred into a finish-forming station, known per se and not further illustrated, of the press-blow glass forming machine. This generally happens in the case of the I.S. glass forming machines by means of a so-called invert mechanism which pivots the neck tool 2 and the parison 18 by 180° about a horizontal axis into the finish-forming station, where the parison 18 is then disposed with the neck 19 towards the top.

The lines 53, 55 of the cylinder 50 can also be controlled in other ways. For this purpose, the lines 53, 55 are connected in the manner illustrated in Figure 8 to a 4 port/2 position valve 71. In the upper switched position, illustrated in Figure 8, of the directional control valve 71 the first cylinder chamber 52 is influenced by compressed air, as a result of which the piston 49 is displaced with the pressing element 44 into its uppermost end position. A pressure spring corresponding to the pressure spring 64 in Figures 4 and 5 is not necessary in this case. On the contrary, the cylinder 50 is designed and connected double-acting. The pressing element 44 and the piston 49 then also remain in this uppermost position when the assembly 44, 45, 48 is placed on the parison mold 1 which is now loaded with the glass gob 38. This uppermost position of the pressing element 44 and the piston 49 can be maintained until the pressing plunger 10 has arrived at its uppermost end operating position as shown in Figure 4 and 5. Until this point, the surface 67 of the pressing element 44 is normally not in contact

with the base 66 of the glass gob 38. Only when the pressing plunger has arrived at its uppermost end operating position as shown in Figure 4 is the directional control valve 71 switched downwards in Figure 8. As a consequence, the first cylinder chamber 52 is vented and the second cylinder chamber 54 is influenced by compressed air. As a result, the piston 49 moves downwards with the pressing element 44 and finish-presses the parison 18 in the same manner, as this was described in connection with Figure 5. The molding process then continues as far as the state illustrated in Figure 6 in the same manner as previously described.

Figure 9 corresponds to Figure 5 in so far as in Figure 9 the parison 18 is likewise finish-pressed in the parison mold 1 which is still closed. In this case, a so-called wide-neck glass with a comparatively large diameter neck will subsequently be produced from a parison 18 in the finish-forming station. In place of the longitudinally-divided parison mold halves 5, 6 in preceding figures, a block mold 72 which is not longitudinally-divided is used in Figure 9. The block mold 72 can be raised and lowered in the directions of the double arrow 73 by means of a lifting mechanism known per se and not further illustrated. For the purpose of closing the parison mold 1 as shown in Figure 9, the neck tool 2 is first closed. The block mold 72 is then raised until a radial annular surface 75 of the block mold lies against a corresponding annular surface 76 of the neck tool 2. A conical locking ring 74 has moved simultaneously into position against a corresponding conical counter surface of the neck tool 2. The locking ring 74 prevents the closed neck tool 2 from unintentionally opening during the pressing process. The pressing element 44 can be displaced in a base orifice 77 of the block mold 72 similar to Figures 7 and 8. The cylinder 50 in this case is, for example, attached by a weld seam or screws to the base of the block mold 72.

Also as shown in Figure 9, the pressing process is performed in two stages, namely with a preliminary pressing process as shown in Figure 4 and a finish-pressing process as shown in Figure 5.

As an alternative to Figure 9, the block mold 72 can also be disposed with the cavity 17 downwards. The glass gob is then introduced through the base orifice 77. The base orifice

[illegible]

**CLAIMS**

1. Method for producing a parison (18) by means of a pressing process in a parison mold (1) of a press-blow glass forming machine, comprising the following steps:
  - (a) A gob (38) of molten glass is introduced from a feed device (32) from the top through a loading orifice (26) into a cavity (17) of the parison mold (1), while the parison mold (1) comprises a neck mold having a closed, longitudinally-divided neck tool (2) which forms a neck (19) of the parison (18),
  - (b) a pressing plunger (10) is pressed into the glass gob (38) through a middle through passage (42) of the neck mold until said pressing plunger in an end operating position (Figure 4;9) lies against the neck mold, wherein the parison (18) is preliminarily pressed until the cavity (17) is partially filled with molten glass,
  - (c) simultaneously with or following Step (b) pressure is exerted using a pressing element (44), which defines a part of the cavity (17), on a base (66) of the parison (18) which has been preliminarily pressed according to Step (b), until the cavity (17) is completely filled with molten glass and the parison (18) is finish-pressed, and
  - (d) when the pressing plunger (10) is in the end operating position (Figure 4; 9), the cavity (17) is completely filled with molten glass and the parison (18) has been formed, on the one hand the pressing element (44) and all the components of the parison mold (1) with the exception of the still closed neck tool (2) are removed to the extent that the still closed neck tool (2) can be transferred with the parison (18) held by the neck tool (2) at the neck (19) into a finish-forming station of the glass forming machine and on the other hand the pressing plunger (10) is moved back out of the parison (18) into an end discharge position (Figure 6),

characterized by the following steps:

- (A) In Step (b) the pressing plunger (10) is moved into its end operating position (Figure 4;9) as far as the stop surface (24) on the neck tool (2), and
- (B) an axially outer sealing edge (20) of the neck (19) of the parison (18) is completely formed by the pressing plunger (10).

2. Method according to claim 1, characterized in

that the glass comes into contact with the pressing element (44) already in Step (A), and

that the pressing element (44) is moved out of the cavity (17) by the glass.

3. Method according to claim 1 or 2, characterized in

that the parison mold (1) comprises longitudinally-divided parison mold halves (5,6),

that the glass gob (38) is introduced through the loading orifice (26) formed in a base of the closed parison mold halves (5,6), and

that the loading orifice (26) is closed after loading by means of the pressing element 44.

4. Method according to any one of claims 1 to 3, characterized in that

the maximum penetration depth of the pressing element (44) into the cavity (17) occurring in Step (B) is determined by means of sensing (57) the displacement of the pressing element (44) relative to the parison mold (1), and



that the displacement sensing (57) is used for controlling and/or regulating the mass of the glass gobs (38) leaving the feed device (32).

5. Apparatus for producing a parison (18) by means of a pressing process in a parison mold (1) of a press-blow glass forming machine,

wherein a gob (38) of molten glass can be introduced from a feed device (32) at the top through a loading orifice (26) into a cavity (17) of the parison mold (1), while the parison mold (1) comprises a neck form with a closed, longitudinally-divided neck tool (2) which forms a neck (19) of the parison (18),

with a pressing plunger (10) which can be pressed into the glass gob (38) through a middle through-passage (42) of the neck mold as far as an end operating position (Figure 4;9) in position against the neck mold for the purpose of the preliminary pressing of the parison (18) and which pressing plunger can be removed from the parison (18) after the parison (18) has been formed,

and with a pressing element (44) which can move relatively to the parison mold (1) and defines a part of the cavity (17),

wherein using the pressing element (44) it is possible to exert pressure on a base (66) of the preliminarily pressed parison (18) until the cavity (17) is completely filled with molten glass and the parison (18) is finish-pressed,

characterized in that the pressing plunger (10) in its end operating position (Figure 4;9) lies (24) against the neck tool (2),

and that an axially outer sealing edge (20) of the neck (19) of the parison (18) can be completely formed by the pressing plunger (10).

6. Apparatus according to claim 5,

characterized in that the parison mold (1) comprises longitudinally-divided parison mold halves (5,6),

that the loading orifice (26) is formed in a base of the closed parison mold halves (5,6),

and that the loading orifice (26) can be closed after loading by means of the pressing element (44).

7. Apparatus according to claim 5,

characterized in that the parison mold (1) comprises a block mold (72) which is not longitudinally-divided,

that the pressing element (44) is displaceably mounted in a lower base orifice (77) of the block mold (72),

that the closed neck tool (2) in the upwards direction is adjacent to the loading orifice (26) of the block mold (72),

and that a locking ring (74) of the block mold (72) in a radially outwards direction lies adjacent to the closed neck tool (2).

8. Apparatus according to any one of the claims 5 to 7,

characterized in that a shaft (16), which is wider than the pressing plunger (10), is adjacent to a foot (22) of the pressing plunger (10),

and that a forming ring (21) for the purpose of forming the complete axially outer

sealing edge (20) of the neck (19) of the parison (18) is formed in an annular end face (23) of the shaft (16) adjacent to the foot (22).

9. Apparatus according to claim 8,

characterized in that the end face (23) for the purpose of defining the end operating position (Figure 4;9) of the pressing plunger (10) lies against a stop surface (24) of the closed neck tool (2).

10. Apparatus according to any one of claims 5 to 9,

characterized in that a cylindrical shaft (16) is adjacent to a foot (22) of the pressing plunger (10),

and that the shaft (16) is received on a last part of the path of the pressing plunger (10) as far as its end operating position (Figure 4;9) in a centering ring (41) which is fixed relative to the parison mold (1) and is guided and centered in the radial direction through the centering ring (41).

11. Apparatus according to claim 10,

characterized in that the centering ring (41) is not longitudinally divided and that the centering ring (41) is held radially outwards in a holding groove (7) of the neck tool (2).

**ABSTRACT**

Method and apparatus for pressing a parison.

A parison mold (1) is composed of neck tool halves (3,4) and parison mold halves (5,6). A gob of molten glass had first been introduced through an upper loading orifice (26) into a cavity (17) of the parison mold (1), while a pressing plunger (10) was located in a lower loading position. An assembly consisting of a pressing element (44), a guide sleeve (45) and a piston-cylinder unit (48) was introduced into the loading orifice (26). Subsequently the pressing plunger (10) was raised from its loading position into the illustrated upper end operating position until its annular end face (23) had moved into position against a stop surface (24) of the neck tool (2). Following the preliminary pressing process a neck chamber in the cavity (17) is still free from molten glass. It is only at this point that the pressing element (44) exerts pressure on a base (66) of the parison which is being produced. The molten glass is also pressed into the hitherto still free neck chamber of the cavity (17). The finish-pressing process of the parison is thus completed and the parison mold (1) can be opened for the purpose of transferring the parison into a finish-forming station.

(Fig. 4)

Patented by Hermann Heye

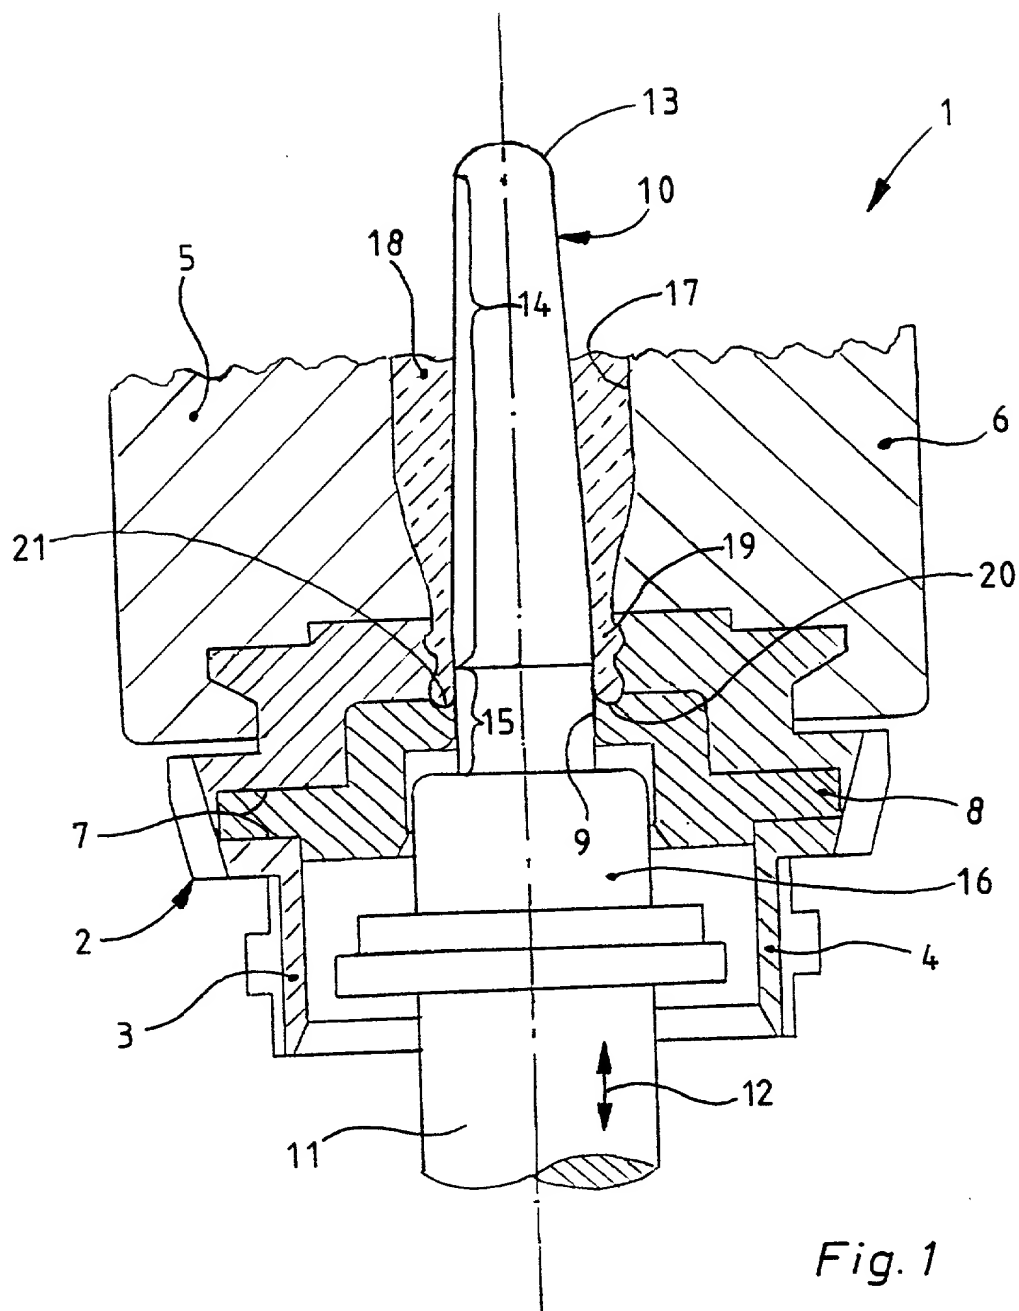
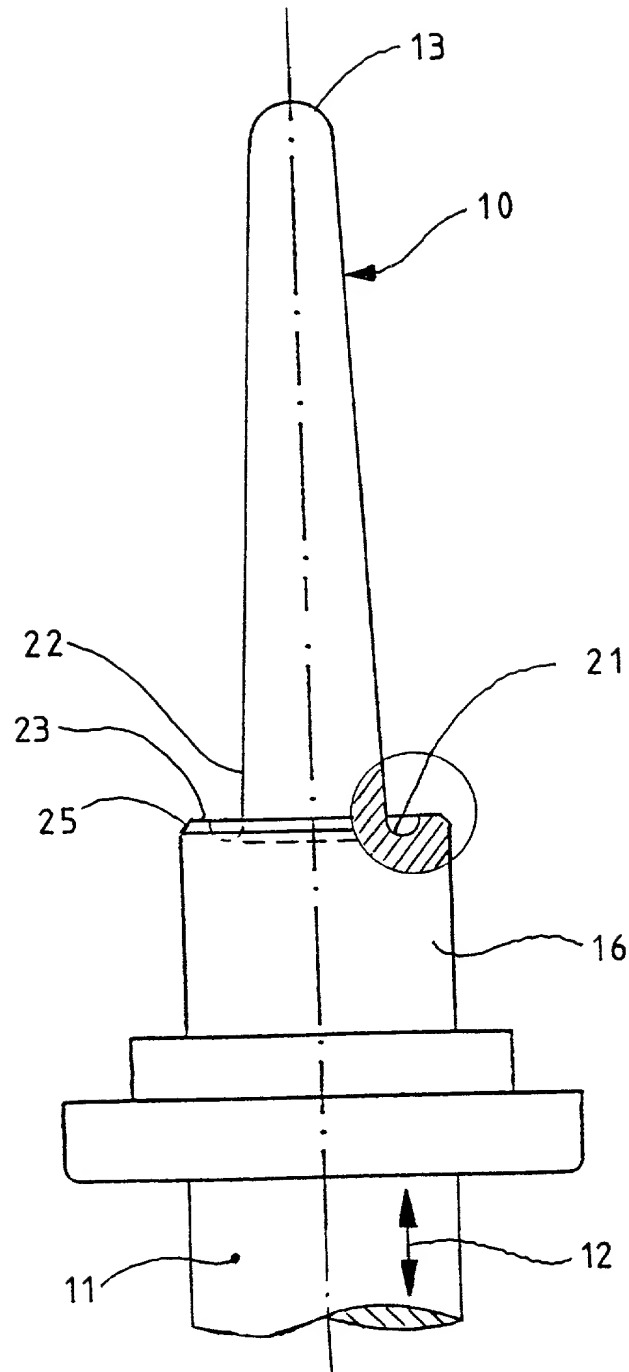


Fig. 2



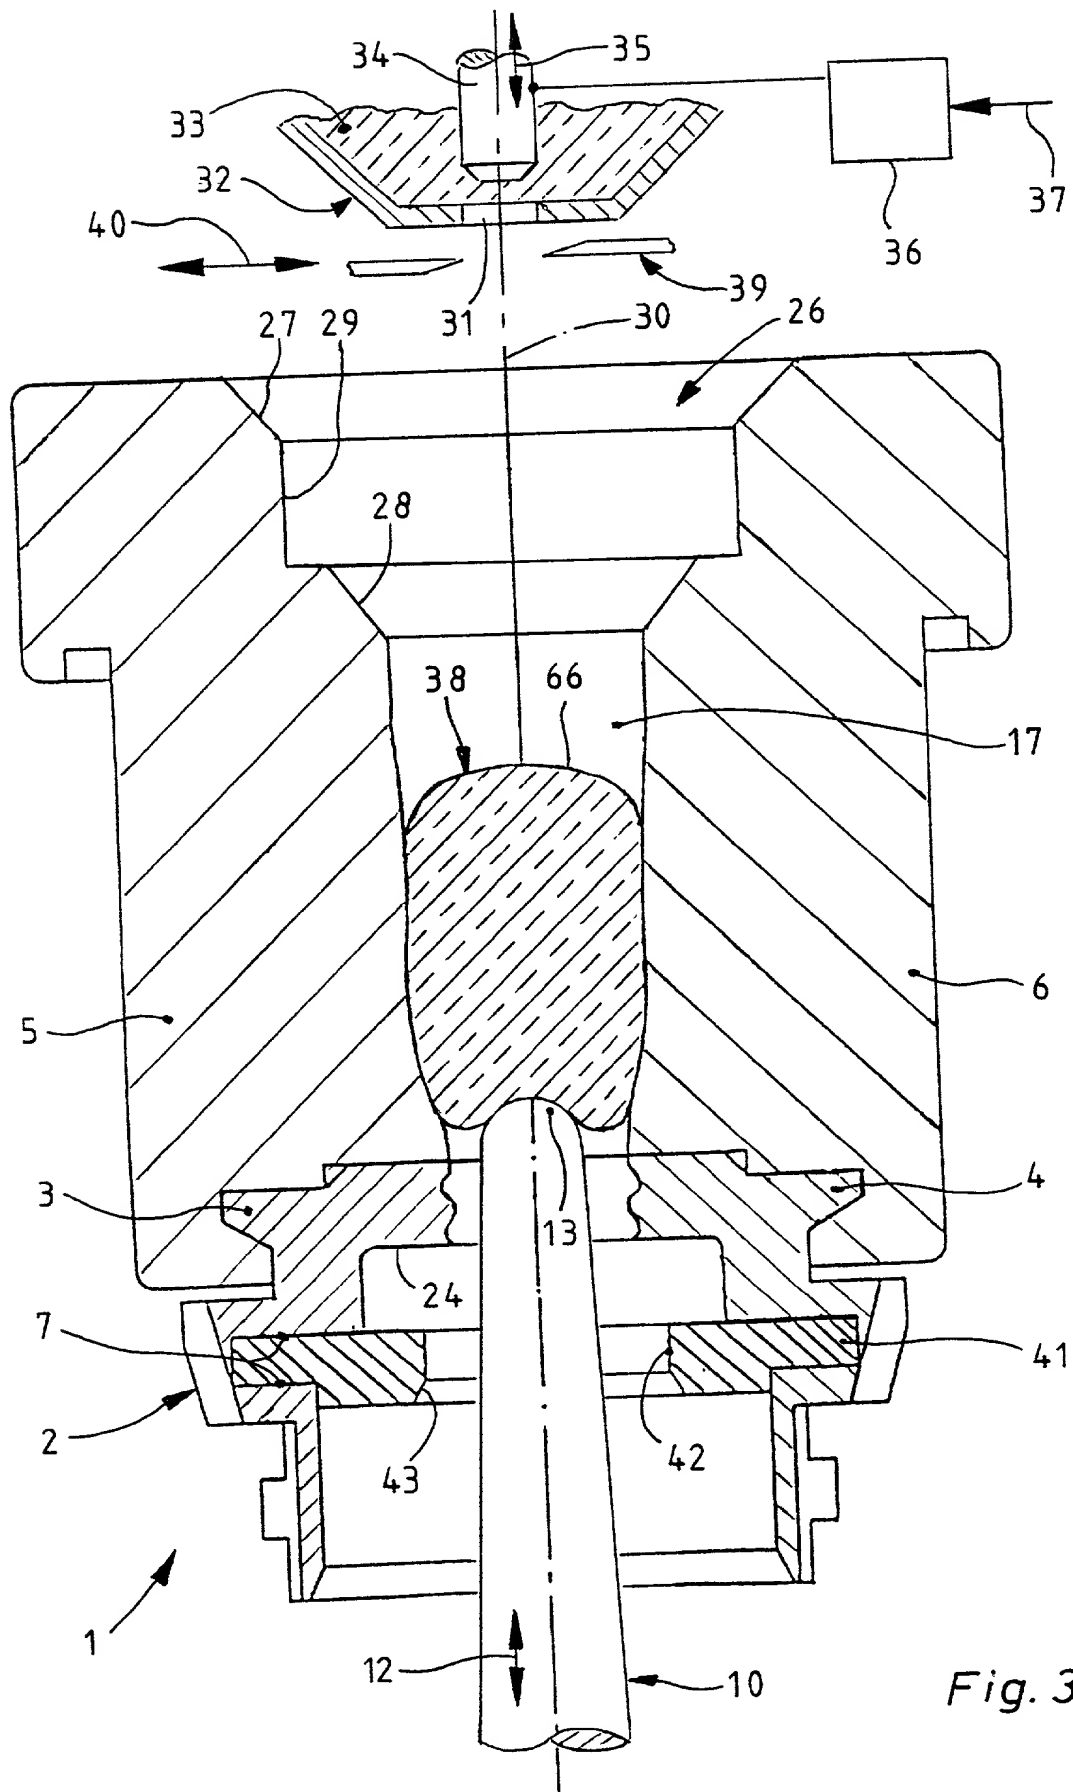


Fig. 3

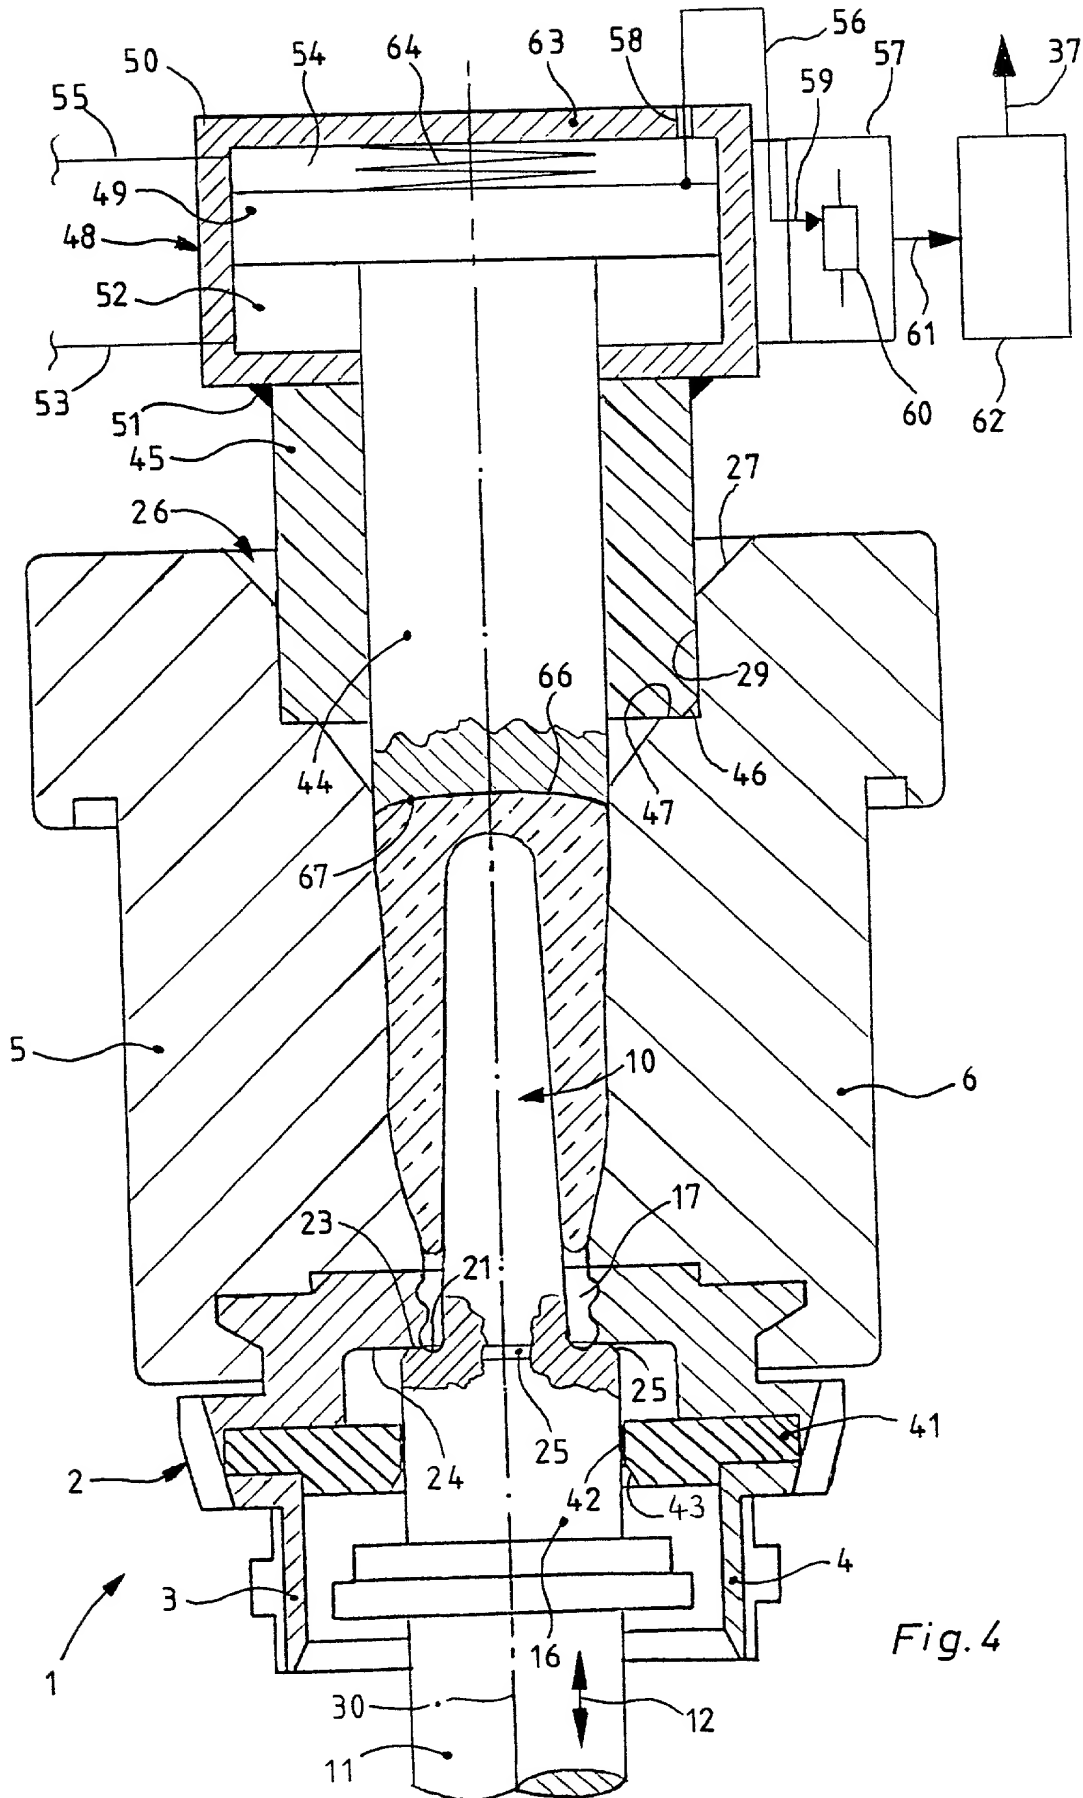


Fig. 4



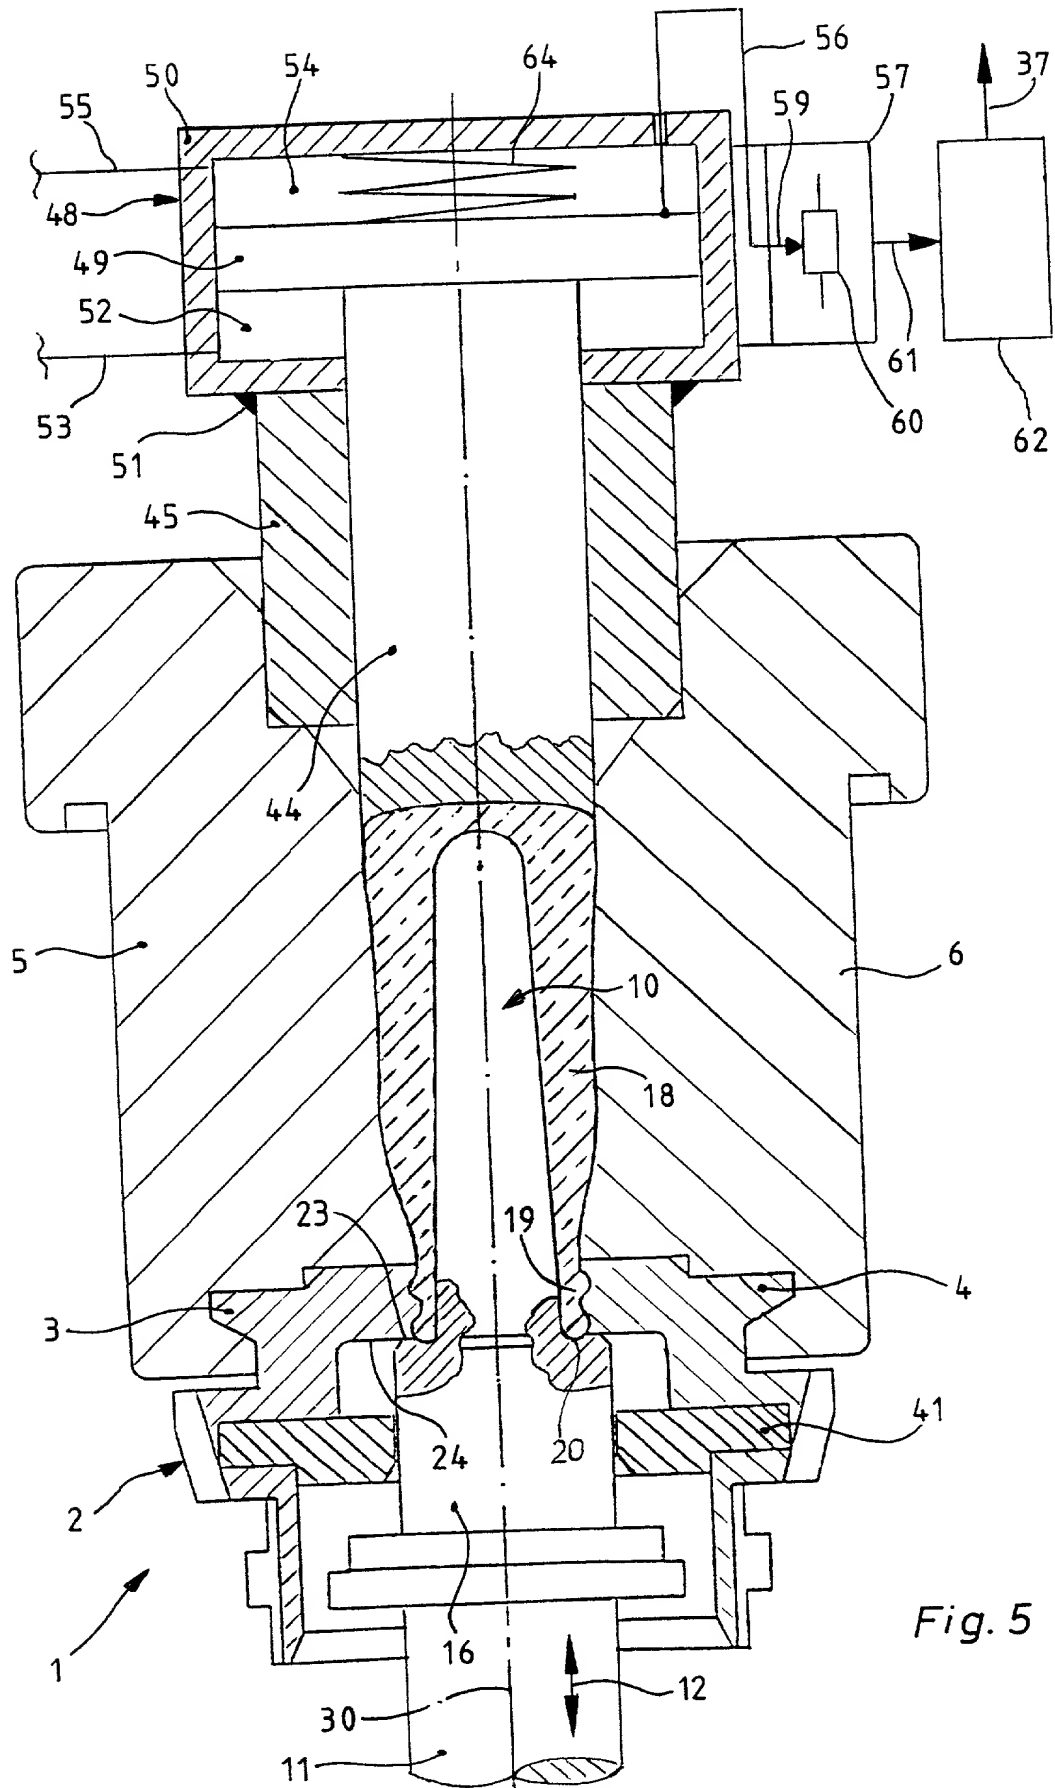


Fig. 5



Fig. 7

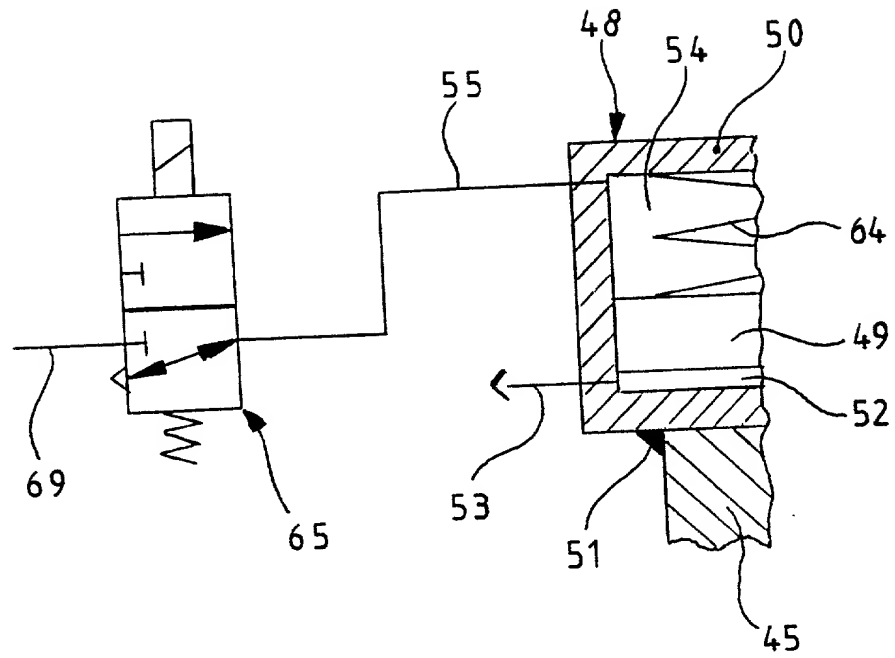
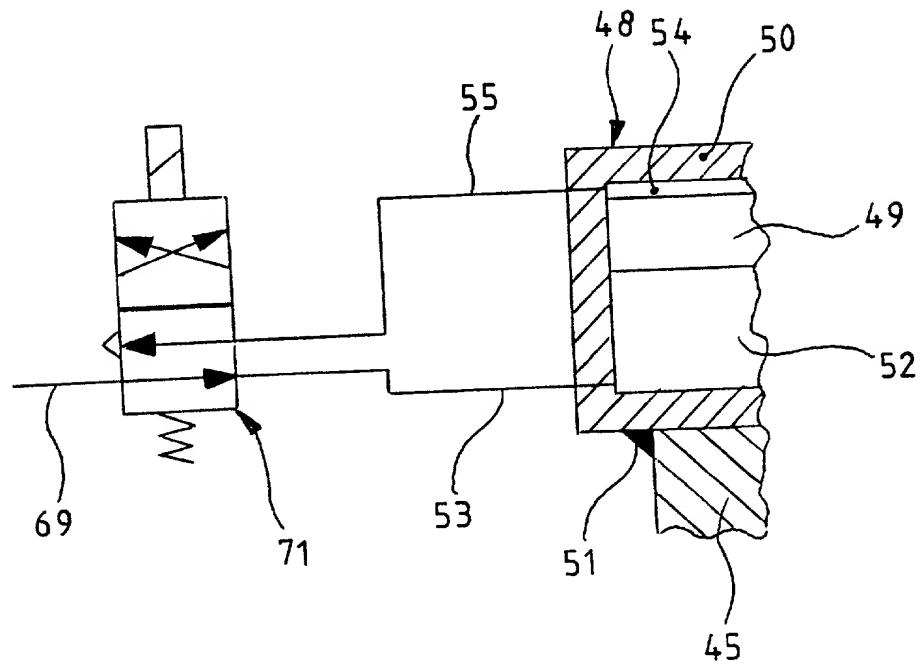


Fig. 8



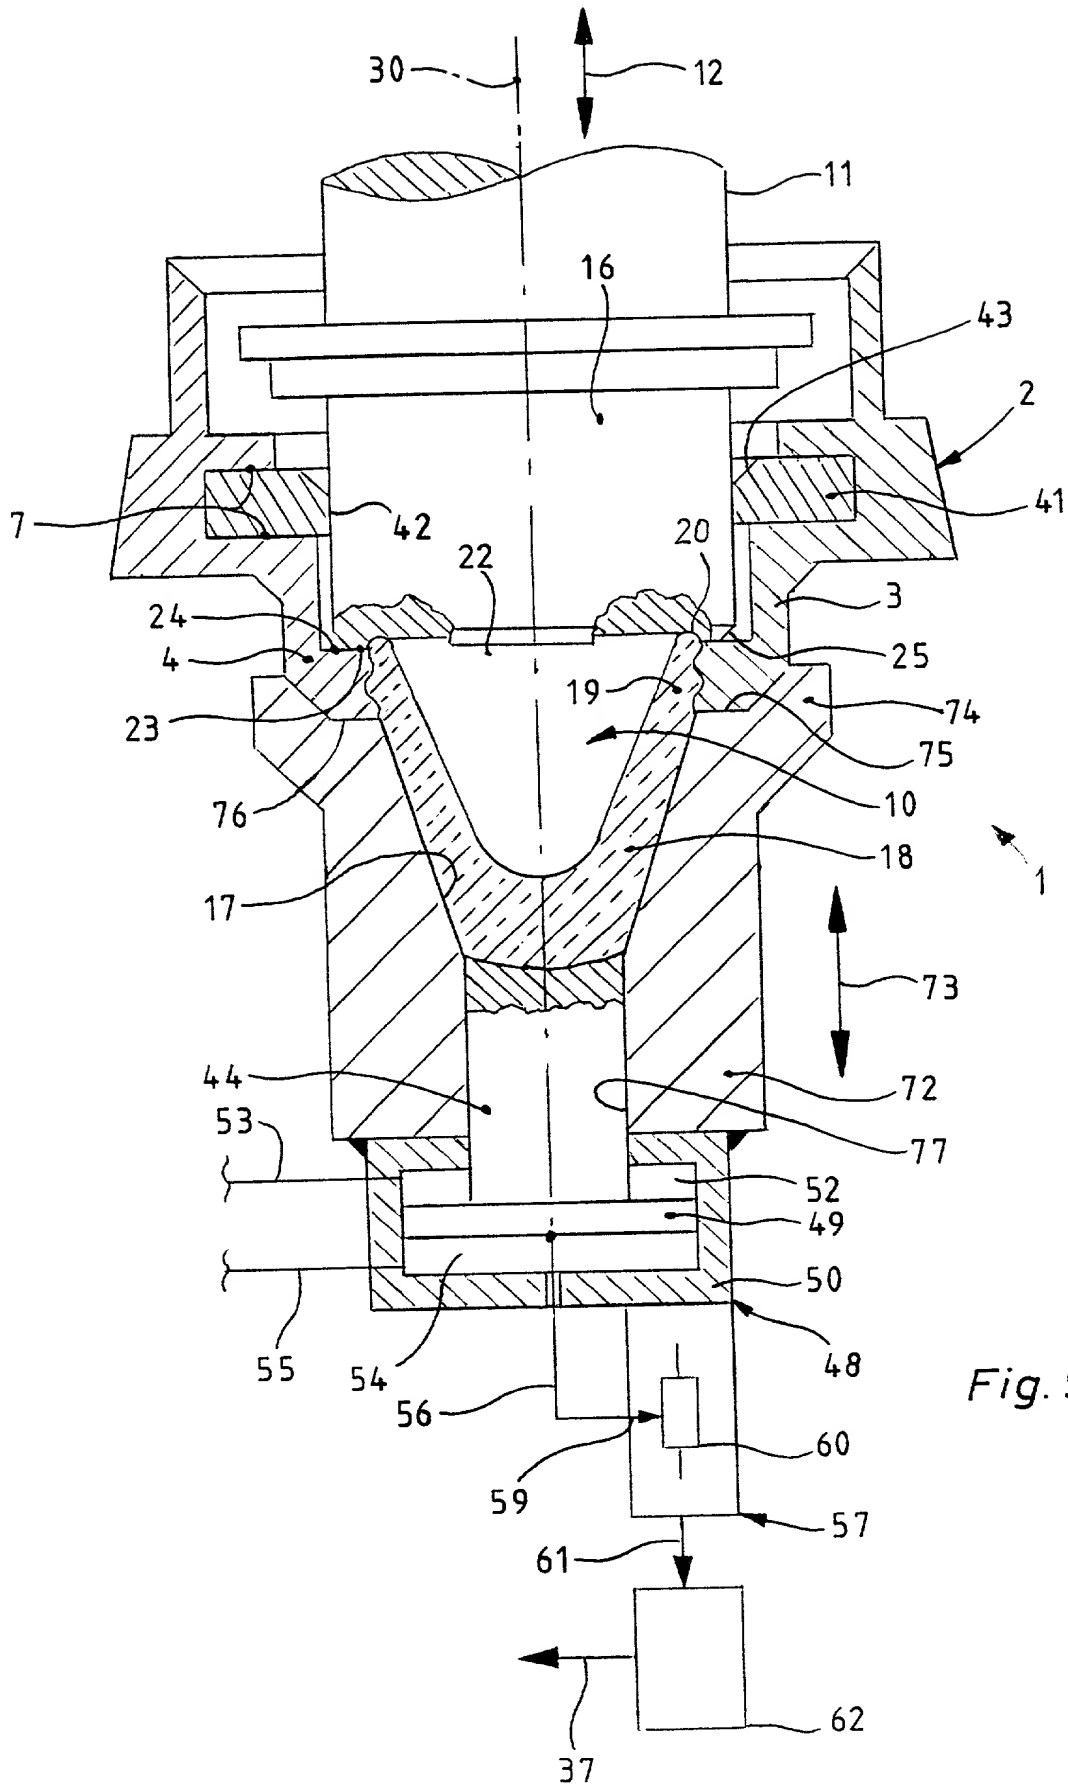


Fig. 9

## German Language Declaration

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäß Title 35, US-Code, § 119 (a)-(d), bzw. § 365(b) aller unten aufgeführten Auslandsanmeldungen für Patente oder Erfinderurkunden, oder § 365(a) aller PCT internationalen Anmeldungen, welche wenigstens ein Land ausser den Vereinigten Staaten von Amerika benennen, und habe nachstehend durch ankreuzen sämtliche Auslandsanmeldungen für Patente bzw. Erfinderurkunden oder PCT internationale Anmeldungen angegeben, deren Anmeldetag dem der Anmeldung, für welche Priorität beansprucht wird, vorangeht.

Prior Foreign Applications  
(Frühere ausländische Anmeldungen)

199 35 866.4	Germany
(Number) (Nummer)	(Country) (Land)

(Number) (Nummer)	(Country) (Land)

Ich beanspruche hiermit Prioritätsvorteile unter Title 35, US-Code, § 119(e) aller US-Hilfsanmeldungen wie unten aufgezählt.

(Application No.) (Aktenzeichen)	(Filing Date) (Anmeldetag)

(Application No.) (Aktenzeichen)	(Filing Date) (Anmeldetag)

Ich beanspruche hiermit die mir unter Title 35, US-Code, § 120 zustehenden Vorteile aller unten aufgeführten US-Patentanmeldungen bzw. § 365(c) aller PCT internationalen Anmeldungen, welche die Vereinigten Staaten von Amerika benennen, und erkenne, insofern der Gegenstand eines jeden früheren Anspruchs dieser Patentanmeldung nicht in einer US-Patentanmeldung, bzw. PCT internationalen Anmeldung in in einer gemäß dem ersten Absatz von Title 35, US-Code, § 112 vorgeschriebenen Art und Weise offenbart wurde, meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Title 37, Code of Federal Regulations, § 1.56 von Belang sind und die im Zeitraum zwischen dem Anmeldetag der früheren Patentanmeldung und dem nationalen oder im Rahmen des Vertrags über die Zusammenarbeit auf dem Gebiet des Patentwesens (PCT) gültigen internationalen Anmeldetags bekannt geworden sind.

(Application No.) (Aktenzeichen)	(Filing Date) (Anmeldetag)

(Application No.) (Aktenzeichen)	(Filing Date) (Anmeldetag)

Ich erkläre hiermit, daß alle in der vorliegenden Erklärung von mir gemachten Angaben nach bestem Wissen und Gewissen der Wahrheit entsprechen, und ferner daß ich diese eidesstattliche Erklärung in Kenntnis dessen ablege, daß wissentlich und vorsätzlich falsche Angaben oder dergleichen gemäß § 1001, Title 18 des US-Code strafbar sind und mit Geldstrafe und/oder Gefängnis bestraft werden können und daß derartige wissentlich und vorsätzlich falsche Angaben die Rechtswirksamkeit der vorliegenden Patentanmeldung oder eines aufgrund deren erteilten Patentes gefährden können.

I hereby claim foreign priority under Title 35, United States Code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed  
Priorität nicht beansprucht

30. July 1999	<input type="checkbox"/>
(Day/Month/Year Filed) (Tag/Monat/Jahr der Anmeldung)	

	<input type="checkbox"/>
(Day/Month/Year Filed) (Tag/Monat/Jahr der Anmeldung)	

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(Status) (patented, pending, abandoned) (Status) (patentiert, schwebend, aufgegeben)

(Status) (patented, pending, abandoned) (Status) (patentiert, schwebend, aufgegeben)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

# Declaration and Power of Attorney for Patent Application

## Erklärung für Patentanmeldungen mit Vollmacht

### German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

daß mein Wohnsitz, meine Postanschrift und meine Staatsangehörigkeit den im nachstehenden nach meinem Namen aufgeführten Angaben entsprechen, daß ich nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent für die Erfindung mit folgendem Titel beantragt wird:

deren Beschreibung hier beigelegt ist, es sei denn (in diesem Falle Zutreffendes bitte ankreuzen), diese Erfindung

- ☐ wurde angemeldet am \_\_\_\_\_ unter der US-Anmeldenummer oder unter der Internationalen Anmeldenummer im Rahmen des Vertrags über die Zusammenarbeit auf dem Gebiet des Patentwesens (PCT) \_\_\_\_\_ und am \_\_\_\_\_ abgeändert (falls zutreffend).

Ich bestätige hiermit, daß ich den Inhalt der oben angegebenen Patentanmeldung, einschließlich der Ansprüche, die eventuell durch einen oben erwähnten Zusatzantrag abgeändert wurde, durchgesehen und verstanden habe.

Ich erkenne meine Pflicht zur Offenbarung jeglicher Informationen an, die zur Prüfung der Patentfähigkeit in Einklang mit Titel 37, Code of Federal Regulations, § 1.56 von Belang sind.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR PRESSING

A PARISON

the specification of which is attached hereto unless the following box is checked:

- ☒ was filed on July 25, 2000 as United States Application Number or PCT International Application Number PCT/EP00/07088 and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

## German Language Declaration

**VERTRETUNGSVOLMACHT:** Als benannter Erfinder beauftrage ich hiermit den (die) nachstehend aufgeführten Patentanwalt (Patentanwälte) und/oder Vertreter mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Angelegenheiten vor dem US-Patent- und Markenamt: *(Name(n) und Registrationsnummer(n) auflisten)*

Postanschrift:


Telefonische Auskünfte: *(Name und Telefonnummer)*

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: *(list name and registration number)*  
 Gary A. Hecht, Reg. No. 36,826  
 Joseph F. Posillico, Reg. No. 32,290  
 Charles H. Lindrooth, Reg. No. 20,659  
 John A. Chionchio, Reg. No. 40,954

Send Correspondence to: Gary A. Hecht  
Synnestvedt & Lechner LLP, 1101 Market St.,  
Philadelphia, PA 19107-2950

Direct Telephone Calls to: *(name and telephone number)*

Gary A. Hecht (215) 923-4466

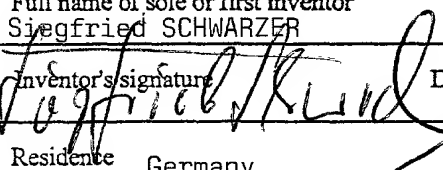Vor- und Zuname des einzigen oder ersten Erfinders <span style="float: right;">100</span>		Full name of sole or first inventor Siegfried SCHWARZER	
Unterschrift des Erfinders	Datum	Inventor's signature 	Date Feb. 23 2004
Wohnsitz		Residence Germany	
Staatsangehörigkeit		Citizenship German	
Postanschrift		Post Office Address Nienburger Strasse 59	
		D-31683 Stöckse <span style="float: right;">DEX</span> Germany	
Vor- und Zuname des zweiten Miterfinders (falls zutreffend)		Full name of second joint inventor, if any	
Unterschrift des zweiten Erfinders	Datum	Second Inventor's signature	Date
Wohnsitz		Residence	
Staatsangehörigkeit		Citizenship	
Postanschrift		Post Office Address	

(Im Falle dritter und weiterer Miterfinder sind die entsprechenden Informationen und Unterschriften hinzuzufügen.)

(Supply similar information and signature for third and subsequent joint inventors.)